

REDLAMP

Quality You Can Trust



TRANSPARENT LED SCREEN



The LED transparent display screen has a unique display effect, because the display background is transparent, which can make the advertising picture feel suspended in the glass wall, and has good advertising effect and artistic effect.

With a permeability of 35% – 95%, it guarantees the original lighting perspective function of the glass curtain wall, and does not affect the appearance and style of the building.

Cabinet size (mm)

- 500*1000
- 1000*1000

Pixel Pitch (mm)

- P2.6-5.95
- P3.9-7.8

Main Features:

- Thin & light
- Transparent
- Energy efficient
- Stable and safe
- Modular design
- Support various sizes
- Easy to install and maintain





Thin & Transparent



- Light in weight
- Easy maintenance
- High transparency without affecting lighting and sight





Energy Saving

Multi-layers PCB circuit design, ensuring the even current distribution of the panel, benefit to fast heat dissipation.

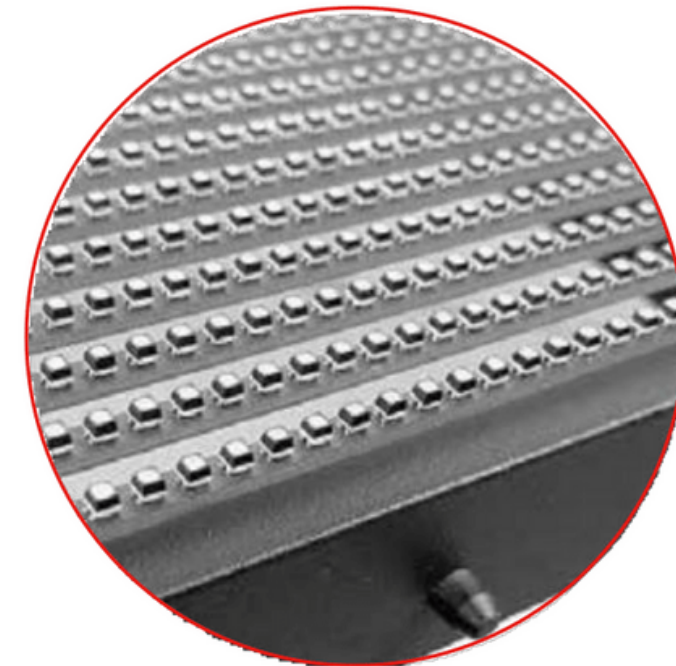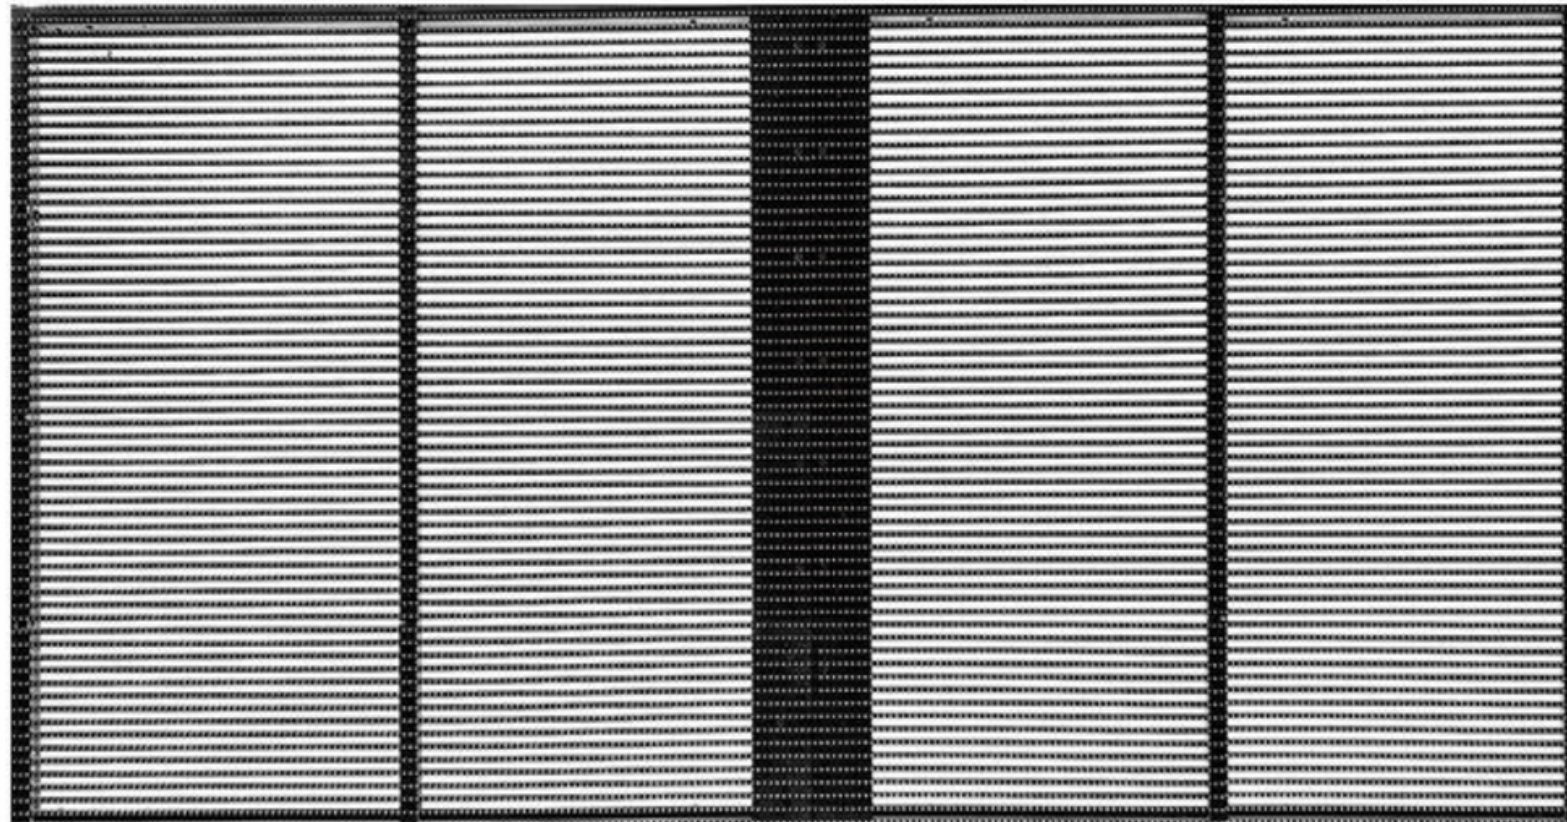



Parameters: (T=25°C)

Pixel Pitch	P2.6-5.95mm	P3.9-7.8mm
Pixel Structure	1R1G1B	1R1G1
Pixel Density	64641/m ²	32873/m ²
Module Resolution	384X168	128X16
Cabinet Size (mm)	1000*500 1000*1000	1000*500 1000*1000
Brightness	≥3500cd/m ²	≥3500cd/m ²
Color Temperature	2000K—12500K adjustable	2000 K—12500K adjustable
Viewing Angle (H)	≥160°	≥160°
Viewing Angle (V)	≥140°	≥140°
Viewing Distance	≥5m	≥5m
Constrast	≥5000:1	≥5000:1
Signal Process	16bit*3	16bit*3
Gray Level	12-14bit	12-14bit
Control Method	Synchronised	Synchronised
Continue Work Time	≥72h	≥72h
Lift Span	50,000h	50,000h
IP Level	IP20	IP20
Work Temperature	-20°C to 50°C	-20°C to 50°C

REDLAMP LED

Address : The Building C
Tangtou Industrial Park
Shiyan Town, Boan district
Shenzhen

Distributor - UAE

TRICOLOR

Al Shaali Building
Al Qusais 1, Dubai, UAE

0487 887 19

Pin - 384 912